




**Example program 06:30 to 07:30 Tu, Fri & 0630 to 0700 Mon, Wed, Thu, Sat, Sun**

To ensure there are no programmed steps already stored in the timer, press the “R” (reset) button. This will erase all program entries and reset the clock to zero.

**First, set the correct time and current day.**

- 1, Press “Y”.
- 2, Press “+” until the word “clock” flashes on right side of the display.
- 3, Press “Y”.
- 4, Press “+” as many times as needed to set the hour for the current time.
- 5, Press “Y”.
- 6, Press “+” as many times as needed to set the minute for the current time.
- 7, Press “Y”.
- 8, Press “+” as many times as needed to set the current day.
- 9, Press “Y”.


**The time and current day are now set and you should be back at the normal display.**

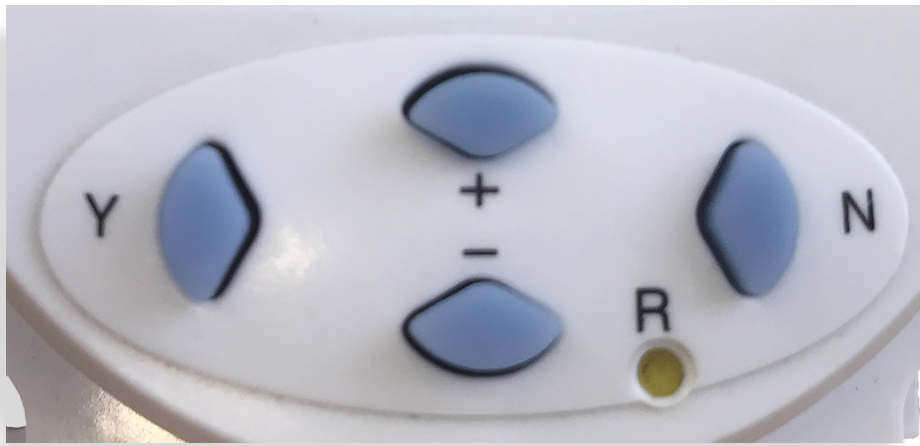

### **PROGRAMMING 06:30 - 07:00 EVERY DAY**

- 1, Press “Y” three times to set the hour for the “ON” time.
- 2, Press the “+” until the hour reads “6”.
- 3, Press “Y”.
- 5, Press “+” until the minutes read “30”.
- 6, Press “Y”.
- 7, Press “+” until all of the days appear at the top of the display.
- 8, Press “Y”
- 9, Press “+” to select “01 off”.
- 10, Press “Y”.
- 11, Press “+” Until the hour reads “7”.
- 12, Press “Y”.
- 13, if minutes not already set, Press “+” until the minutes read “00”
- 14, Press “Y”.
- 15, Press “+” to until all days at the top of the display are visible.
- 16, Press “Y”.,
- 17: Press “N” to return to the normal display.


**The timer is now setup to bring the output on every day from 6:00 until 7:30**

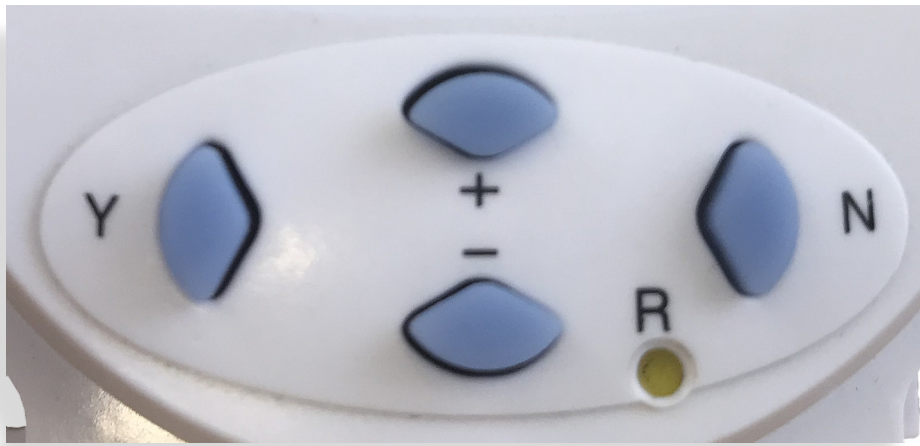

### **PROGRAMMING 06:30 - 07:30 TUESDAY**

- 1, Press “Y” two times to set the hour for the “ON” time.
- 2, Press the “+” until you see “02 on” on the left of the display
- 3, Press “Y”.
- 2, Press the “+” until the hour reads “7”.
- 3, Press “Y”.
- 5, Press “+” until the minutes read “00”.
- 6, Press “Y”.
- 7, Press “+” until “TU” is visible at the top of the Display.
- 8, Press “Y”
- 9, Press “+” to select “02 off”.
- 10, Press “Y”.
- 11, Press “+” Until the hour reads “7”.
- 12, Press “Y”.
- 13, if minutes not already set, Press “+” until the minutes read “30”
- 14, Press “Y”.
- 15, Press “+” until “TU” is visible at the top of the Display.
- 16, Press “Y”.,
- 17: Press “N” to return to the normal display.

**The timer is now setup to bring the output on every Tuesday from 6:00 until 7:30**

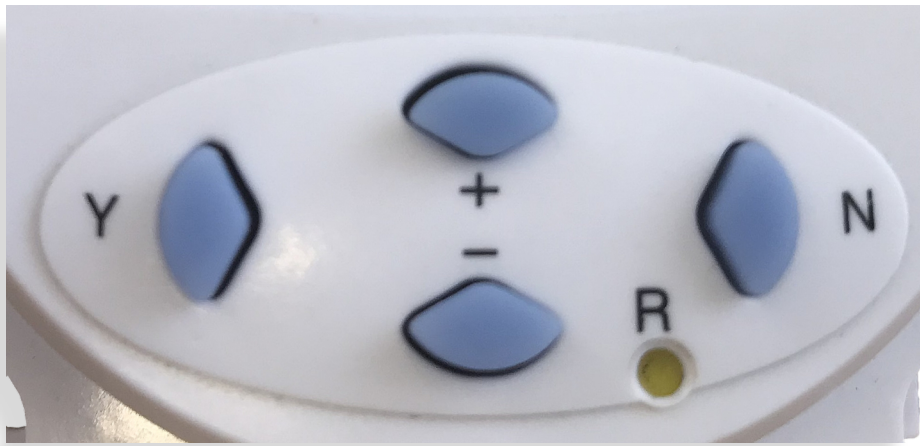

### **PROGRAMMING 06:30 - 07:30 FRIDAY**

- 1, Press “Y” two times to set the hour for the “ON” time.
- 2, Press the “+” until you see “03 on” on the left of the display
- 3, Press “Y”.
- 2, Press the “+” until the hour reads “7”.
- 3, Press “Y”.
- 5, Press “+” until the minutes read “00”.
- 6, Press “Y”.
- 7, Press “+” until “FR” is visible at the top of the Display.
- 8, Press “Y”
- 9, Press “+” to select “03 off”.
- 10, Press “Y”.
- 11, Press “+” Until the hour reads “7”.
- 12, Press “Y”.
- 13, if minutes not already set, Press “+” until the minutes read “30”
- 14, Press “Y”.
- 15, Press “+” until “FR” is visible at the top of the Display.
- 16, Press “Y”.,
- 17: Press “N” to return to the normal display.

**The timer is now setup to bring the output on every Friday from 6:00 until 7:30**